

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number  
**WO 2005/014252 A1**

(51) International Patent Classification<sup>7</sup>: **B28D 1/04**,  
B23D 45/02, 47/04, B28D 1/00 // B23D 1/04

(74) Agents: **LUKSCH**, Giorgio et al.; c/o ING. A. Giambro-  
cono & C. S.r.l., Via Rosolino Pilo, 19/B, I-20129 Milan  
(IT).

(21) International Application Number:  
PCT/IB2003/006303

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,  
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,  
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,  
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:  
24 December 2003 (24.12.2003)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:  
MI2003A 001645 8 August 2003 (08.08.2003) IT

(84) Designated States (*regional*): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NI, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **PRUS-  
SIANI ENGINEERING S.A.S. DI PRUSSIANI**  
**MARIO GI** [IT/IT]; Mario Giorgio & C., 177 Via Mazz-  
ini, I-24021 Albino (Bergamo) (IT).

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): **PRUSSIANI**, Mario,  
Giorgio [IT/IT]; 43 Via Andrea d'Albino, I-24021 Albino  
(Bergamo) (IT).

Published:

- with international search report
- with amended claims

[Continued on next page]

(54) Title: DEVICE WITH A CIRCULAR BLADE FOR CUTTING FLAT MARBLE, GRANITE AND GLASS SHEETS

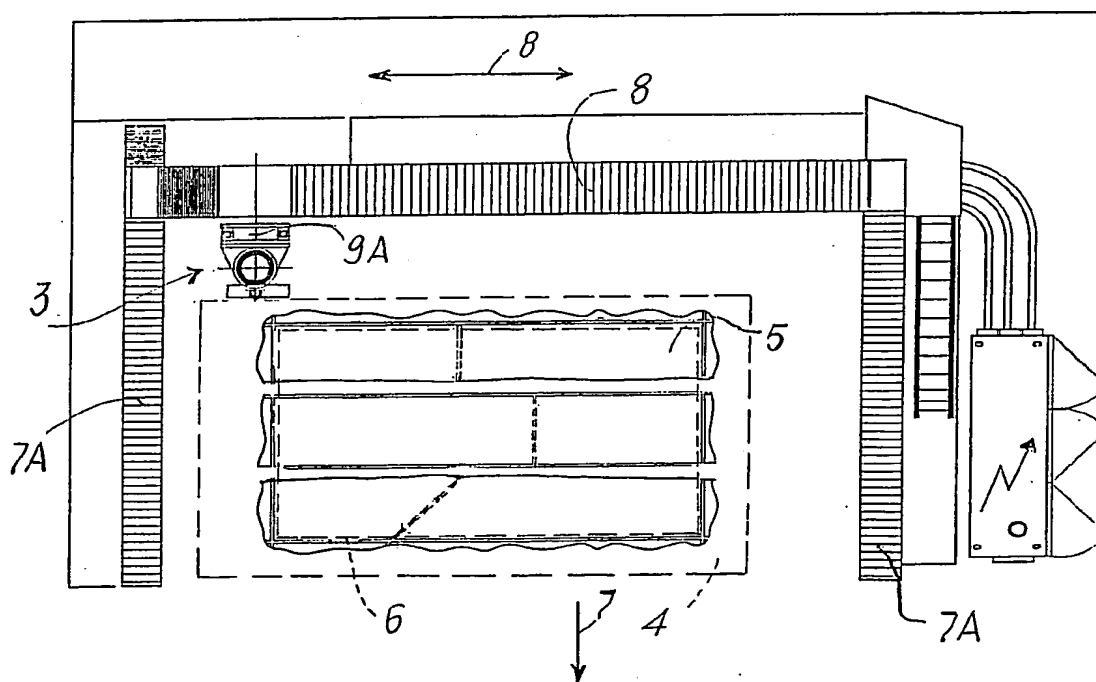

(57) Abstract: A circular blade device (1) for cutting flat marble, granite, glass or similar sheets (5), comprising numerical control means (2) for a cutting head (3) having a blade (14) addressable within a cutting volume, which comprises means for manipulating said sheets within said cutting volume.

WO 2005/014252 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## DEVICE WITH A CIRCULAR BLADE FOR CUTTING FLAT MARBLE, GRANITE OR GLASS SHEETS

The present invention relates to a circular blade device for cutting  
5 flat marble, granite and glass sheets, in accordance with the introduction  
to the main claim.

Sheet cutting devices have been available commercially for some  
time, devices provided with a diamond-set circular blade being habitually  
used for cutting marble, granite, general stone, glass and other sheets.

10 The blade is usually controlled by numerical control means, which  
guide it during sheet cutting. Such sheets present virtually standard  
dimensions, and need to be shaped to form table tops, steps for stairs,  
kitchen worktops, etc. The sheets are cut by laying them on a cutting area  
and operating the cutting device.

15 However, as is well known to the expert of the art, the use of  
diamond-set circular blades does not enable a cut to be made without  
material wastage. In this respect because of its particular shape, the  
blade cuts completely only on its diagonal to the cutting plane while,  
depending on the blade radius, the material present more or less distant  
20 from the diagonal is only partly cut. In effect the shape of the cut follows  
the shape of the blade.

When cutting stone sheets, in most cases a first series of  
longitudinal cuts are made along the entire length of the sheet. The  
sheets are then moved manually and the transverse cuts are made. This  
25 manual movement is done by expert operators such as to exclude the  
sheet appendices from the range of action of the blade, to hence enable

the transverse cut to be made without damaging the previously worked sheets. However this operation requires the presence of an operator to continuously supervise the production process. Moreover the idle times due to this movement are extremely harmful to machine productivity. In this respect, the advantage of a numerically controlled working centre is not only its working precision but also its high productivity; the presence of such idle times leads to a halving of the rated productivity of the machine, plus a reduction in precision due to the manual positioning.

In addition, granite, glass and the like present a considerable resistance to compression, but a very poor resistance to tension and consequently to bending. This means that those sheets presenting parts with a small resistant cross-section have to be reinforced by means of an insert of rigid material (steel or the like) glued into one or more longitudinal grooves made in said cross-section. Sheets presenting small sections or unconventional shapes also often require reinforcements. The grooves for housing the reinforcements are evidently made in the lower side of the sheet given that the upper side, which is the visible and hence finished side, must not present imperfections.

Currently, these grooves are usually made by using conventional sheet cutting machines; the sheet is turned over, rested on the cutting support with its face downwards, and the grooves made by the same circular blade as used for cutting the sheet. Afterwards, when the reinforcements have been positioned and glued in, the notches are made which reduce the resistant cross-section.

This is extremely uncomfortable and dangerous. In effect the upper surface of the sheets is substantially finished before proceeding to the

sheet cutting; however in making the groove or grooves the sheet is placed with its finished surface on the cutting support. This can cause scraping or scoring of the finished surface of the sheet, making further finishing necessary, with considerable increase in final product cost and  
5 with negative consequences regarding productivity.

Moreover when the sheet is turned over, it may break precisely along those sections of least resistance.

An object of the present invention is therefore to provide a circular blade device for cutting flat marble, granite and glass sheets which  
10 eliminates the stated technical drawbacks of the known art.

A further object of the present invention is in particular to provide a circular blade device for cutting flat marble, granite and glass sheets which eliminates those idle times which arise from the need to manually move the cut sheets in order to make new cuts.

15 A further object of the invention is to eliminate or at least reduce manual operations during a working cycle of the said cutting device in order to improve working precision.

A further object of the invention is to provide a circular blade device for cutting flat sheets which enables the grooves to be made in the lower  
20 side of the sheet without having to turn it over or rest it on the finished side for support, hence avoiding the danger of scraping or scoring the finished surface, or of breaking the sheet.

These and further objects are attained by a circular blade device for cutting flat marble, granite, glass and similar sheets in accordance with the  
25 accompanying claims.

Further characteristics and advantages will be more apparent from the description of a preferred but non-exclusive embodiment of the circular blade device for cutting flat sheets according to the invention, illustrated by way of non-limiting example in the accompanying drawings, in which:

5        Figure 1 is a front view of the circular blade device for cutting flat sheets according to the present invention;

      Figure 2 is a plan view of the device of Figure 1;

      Figure 3 is a front view of a different embodiment of the device of the present invention;

10       Figure 4 is a plan view of the device of Figure 3;

      Figure 5 is an enlarged view of a detail of the device of Figure 3;

      Figure 6 is a view of a different embodiment of the detail of Figure 5;

15       Figure 7 is a plan view of the operating stages of the device of Figure 1;

      Figures from 8 to 10 are side views showing operating stages of the device of Figure 3;

      Figure 11 is a partly sectional schematic side view of a different embodiment of the device of Figure 1, in which an additional part is shown lateral to the cutting plane of Figure 1;

      Figures from 12 to 17 show various positioning and cutting stages of the sheet on the device shown in detail in Figure 9; and

      Figures 18 and 19 show sheets formed by the additional part of Figure 11.

25       Said figures show a circular blade device for cutting flat marble, granite, glass and similar sheets, indicated overall by the numeral 1.

The device comprises a numerical control unit 2 of known type, controlling a cutting head 3 addressable within a cutting volume 4. The cutting head 3, by virtue of manipulating means to which it is connected (and described hereinafter), and addressed by the numerical control unit 2, can reach any point of this volume and, in particular, can reach any point of a flat sheet 5, resting on a cutting support 6. The support 6 comprises in known manner a plurality of rollers 6K on which the sheet 5 rests.

Said manipulating means enable the cutting head 3 to be moved along a horizontal first axis of translation 7 perpendicular to a second 8, these being perpendicular to a vertical third axis of translation of the cutting head 3.

The movement along said axes is obtained by moving a support 3A for the cutting head 3 along a plate or arm 8A lying along the axis 8. This plate or arm 8A can be moved, by usual electrical actuators (not shown), along parallel arms 7A positioned in correspondence with opposing sides 6A of the cutting support 6 and hence lying along the axis 7. The plate or arm 8A moves along the arms 7A rigidly with the support 3A for the cutting head. This support also slides along a guide 9A positioned along the axis 9 to enable the support 3A to move therealong. This sliding is achieved by a suitable electrical actuator, not shown.

The support 3A contains usual means for moving the cutting head, as described hereinafter.

The position control for the head 3, effected along these axes, enables the head to reach any position of the sheet, along any trajectory. The numerical control unit 2 also controls the head movements about

another two axes, i.e. rotation about the axis 9 to enable cuts such as that shown in Figure 2 (i.e. diagonal cuts) to be made, and rotation about an axis 10 perpendicular to the axis 9 (Figure 1) to enable cuts to be made with their edge inclined to the upper and lower surface of the sheet.

5 An articulated arm 17 constitutes a means for moving the sheet appendices 5a, 5b, 5c, 5d, 5e, 5f cut by a diamond-set circular blade 14 present on the cutting head 3. This articulated arm comprises a first straight part 17A which carries a slider 13 (movable along that part) and is perpendicular to and movable relative to a fixed second straight part 17B.  
10 The slider 13 presents vertically mobile manipulator members 12, which in the case of Figure 1 are of sucker form. These members 12, in combination with the movements of the slider 13 of the entire articulated arm 17, enable any of the cut sheet portions 5a-5f to be transported into any point of the cutting region, and in particular out of the range of action  
15 of the blade 14. The first part 17A is driven, under the control of the unit 2, by usual electrical actuators, not shown.

In a different embodiment, the means for moving said sheets comprise the cutting head 3, equipped with sucker members 12.

The movable members 12 are controlled in their vertical movement  
20 by actuator means, which in this particular example, and as visible in Figure 5, are pneumatic pistons rigid with the cutting head 3. This latter comprises a usual electric motor 30 the shaft 31 of which carries the blade 14.

The operation of the aforescribed device is apparent from that  
25 illustrated: in this respect the cutting head 3, and in particular its manipulation system comprising the numerical control unit and the



elements movable along the perpendicular axes 7, 8, 9, accomplishes the double purpose of supporting and addressing the blade 14 in its cutting motion, and of manipulating the sheet 5 and its portions 5a-5f.

In Figures 7 and 8 the operation of the cutting device is shown in its various stages. In stage A of Figure 7, the sheet is in one piece and has just been rested on the support 6. The blade then operates to make cuts 50, 51 which divide the sheet into three parts 52, 53 and 54 (stage B of Figure 7). The manipulation system is positioned above the sheet portion to be moved, and in this case above the portion 54 (Figure 8, stage F); it can be seen that in this case the sucker members 12 are higher than the lower edge of the blade, to enable the cut to be made. Then, without the cutting head 3 changing position, the pneumatic piston 15 is operated to lower the sucker members 12 onto the sheet, and grip it (stage C of Figure 7 and stage G of Figure 8). The cutting head 3 is raised a few millimetres, sufficient to detach the sheet, locked by the suckers, from the support 6 (stage H of Figure 8). The head 3 is then moved sideways (stage D of Figure 7), lowered and the sucker members 12 removed from the sheet. The necessary transverse cuts 55 are then made.

In a different embodiment shown in Figure 6, the manipulator members 12 are wedges which are inserted into the gap left by the cut between the cutting edges; in this case, when the head 3 undergoes a transverse movement (without raising), the cut sheet portion moves. Hence, on termination of the cut, the head 3 is positioned such that the wedges lie above the cut (Figure 9, stage I). The wedge is then lowered into the interior of the cut, until it at least partly penetrates it (Figure 9, stage L). The head 3 is moved transversely with the wedges lowered, with

the result that the sheet is removed from the others by sliding along the support. The cut 55 is then made, as in the preceding cases.

In a further embodiment, it is the blade itself which, on termination of its cutting movement, is used as the appendix for moving the sheet portions, by operating along the edges of the cut.

In that case, on termination of the cut the head 3 remains inside the cut (Figure 10, stage N) and is then moved laterally to consequently move the sheet, which slides along the support 6. The transverse cut or cuts 55 are then made as previously.

In a different embodiment, the manipulator members 12, and in particular the suckers, are addressed in such a manner as to enable them to move within a cutting volume 4 which is much larger than that shown in Figure 1; in particular this volume 4 extends well beyond the cutting support 6.

To the side of said support 6 a ledge 60 is present (see Figure 11) fixed to said support by screws 61. Present on said ledge 60 there are vertical guides 62 on which a frame 63 is present, supporting a milling machine 64 provided with a cutting disc 65. The frame 63 is moved vertically by an actuator 66, for example of pressurized fluid type, which is fixed to the ledge (at 67) and to the frame (at 68) to control the vertical movement of the milling machine 64.

Hence the milling machine is disposed substantially to the side of the cutting support and below the surface on which the sheet rests, and carries a cutting disc 65 able to be brought into a position higher than the cutting support 6.

This embodiment operates in the following manner:

when the sheet has been cut by the cutting head 3 (Figure 12) in the manner already explained, the sheet 5' is raised (Figure 13) and positioned above the milling machine 64 (Figure 14).

5 The sheet 5 is raised substantially by the suction members 12, whether these are mobilized by the cutting head 3 or by an independent slider 13. It should be noted that in Figures from 12 to 17, mobilization is obtained by the slider 13, however it can be equally obtained by means of the cutting head 3, as already described.

Moreover, the sheet 5 does not necessarily have to be raised to be  
10 brought above the blade, but can advantageously be slid along the support 6 by the already described manipulation systems.

The actuator 66 (which in the illustrated example is of the pressurized fluid type) then raises the milling machine 64 which makes the cut in the lower surface of the sheet 5.

15 The cutting movement is imposed by the movement of the slider 13 (this movement in Figure 5 being substantially perpendicular to the plane of the drawing). Hence the groove 70 is obtained in practice.

The milling machine 64 is then lowered (Figure 16) and the sheet 5 is moved to make a second groove 71, in the same manner as the first.

20 This is evidently a description of only one of the numerous cutting cycles obtainable by such a device.

In particular a cutting device such as that described is also advantageous in making grooves in the lower surface of already finished sheets 5, such as that of Figures 18 and 19; in this respect the upper  
25 surface comes into contact only with the suckers 12, so avoiding situations which could ruin it.

In a different embodiment the milling machine 64 is mounted on a rotatable platform (not shown but totally conventional), which enables the cutting plane of the blade to be rotated through at least 90°, so that the groove can also be made in a direction, for example, perpendicular to that  
5 of the grooves 70 and 71.

A circular blade device for cutting flat marble, granite and glass sheets conceived in this manner is susceptible to numerous modifications and variants, all falling within the scope of the inventive concept; moreover all details can be replaced by technically equivalent elements.

10 In practice the materials used and the shapes and dimensions can be chosen at will according to requirements and to the state of the art.

## CLAIMS

1. A circular blade device (1) for cutting flat marble, granite, glass or similar sheets (5), comprising numerical control means (2) for a cutting head (3) having a blade (14) addressable within a cutting volume, characterised by comprising means for manipulating said sheets within  
5 said cutting volume.

2. A device as claimed in claim 1, characterised in that the manipulating means comprise at least one manipulator member provided on a slider (13) controlled by the numerical control means (2) and  
10 addressable within the cutting volume, and movable above the sheet (5) being cut.

3. A device as claimed in claim 1, characterised in that the manipulating means for said sheets (5) comprise at least one manipulator member (12) associated with the cutting head (3), said manipulator  
15 member being arranged to cooperate with the sheet being cut.

4. A device as claimed in claim 2 or 3, characterised in that said manipulator members (12) comprise suckers.

5. A device as claimed in claim 2 or 3, characterised in that said manipulator members (12) comprise a part to be inserted into the cut in  
20 the sheet made by the blade (14) of the head (3), and to cooperate with a cut edge in order to move the sheet.

6. A device as claimed in claim 3, characterised in that said manipulator member (12) is the cutting blade (14), arranged to cooperate with the cut edge of the sheet to achieve its movement.

7. A device as claimed in claim 4 or 5, characterised in that said manipulator member is associated with actuator means (15) which enable it to move vertically.

8. A device as claimed in claim 7, characterised in that said  
5 actuator means (15) are rigid with the cutting head (3).

9. A device as claimed in claim 7, characterised in that said actuator means (15) are of pneumatic type.

10. A device as claimed in claim 7, characterised in that the numerical control means (2) control said actuators.

10 11. A device as claimed in claim 4, characterised in that the suckers operate on the surface of the sheets.

12. A device as claimed in claim 1, characterised by presenting a cutting disc (65) disposed below the sheets (5) in such a manner as to operate on the lower face of the sheets (5).

15 13. A device as claimed in claim 12, characterised in that said cutting disc (56) is disposed to the side of a cutting support (6) on which said sheet (5) is rested during the cutting by the cutting head.

14. A device as claimed in claim 12, characterised in that said cutting disc (65) can be moved vertically by one or more actuators (66).

20 15. A device as claimed in claim 12, characterised in that said cutting disc (65) forms part of a milling machine (64) rigid both with a frame (63) mounted on vertical guides (62) and with an actuator (66) for vertically moving said disc (65).

16. A device as claimed in claim 15, characterised in that said  
25 vertical guides (62) are fixed to a ledge (60) projecting from said support (6).

17. A device as claimed in claim 12, characterised in that said cutting disc (65) can be moved about a vertical axis of rotation to vary its cutting direction.

18. A method for cutting marble or glass sheets, characterised by  
5 translationally moving the sheet until it is brought above a cutting disc (65), and making one or more grooves (70, 71) by a relative movement between the cutting disc (65) and the sheet (5).



**AMENDED CLAIMS**



[received by the International Bureau on 21 September 2004 (21.09.04);  
original claims 1-18 replaced by new claims 1-12 (2 pages)]

1. A circular blade device (1) for cutting flat marble, granite, glass or similar sheets (5), comprising numerical control means (2) for a cutting head (3) having a blade (14) addressable within a cutting volume and comprising means for manipulating said sheets within said cutting volume, characterised in that the manipulating means for said sheets (5) comprise at least one manipulator member (12) extending from the cutting head (3), said manipulator member being arranged to cooperate with the sheet being cut and comprising suchers.
2. A device as claimed in claim 1, characterised in that said manipulator member is associated with actuator means (15) which enable it to move vertically.
3. A device as claimed in claim 2, characterised in that said actuator means (15) are rigid with the cutting head (3).
4. A device as claimed in claim 2 or 3, characterized in that said actuator means (15) are of pneumatic type.
5. A device as claimed in claim 2, characterised in that the numerical control means (2) control said actuators.
6. A device as claimed in claim 1, characterised in that the suckers operate on the surface of the sheets.
7. A device as claimed in claim 1, characterised by presenting a cutting disc (65) disposed below the sheets (5) in such a manner as to operate on the lower face of the sheets (5).
8. A device as claimed in claim 7, characterised in that said cutting disc (56) is disposed to the side of a cutting support (6) on which said sheet (5) is rested during the cutting by the cutting head.



9. A device as claimed in claim 7, characterised in that said cutting disc (65) can be moved vertically by one or more actuators (66).
10. A device as claimed in claim 7, characterised in that said cutting disc (65) forms part of a milling machine (64) rigid both with a frame (63) mounted on vertical guides (62) and with an actuator (66) for vertically moving said disc (65).
11. A device as claimed in claim 10, characterised in that said vertical guides (62) are fixed to a ledge (60) projecting from said support (6).
12. A device as claimed in claim 7, characterised in that said cutting disc (65) can be moved about a vertical axis of rotation to vary its cutting direction.

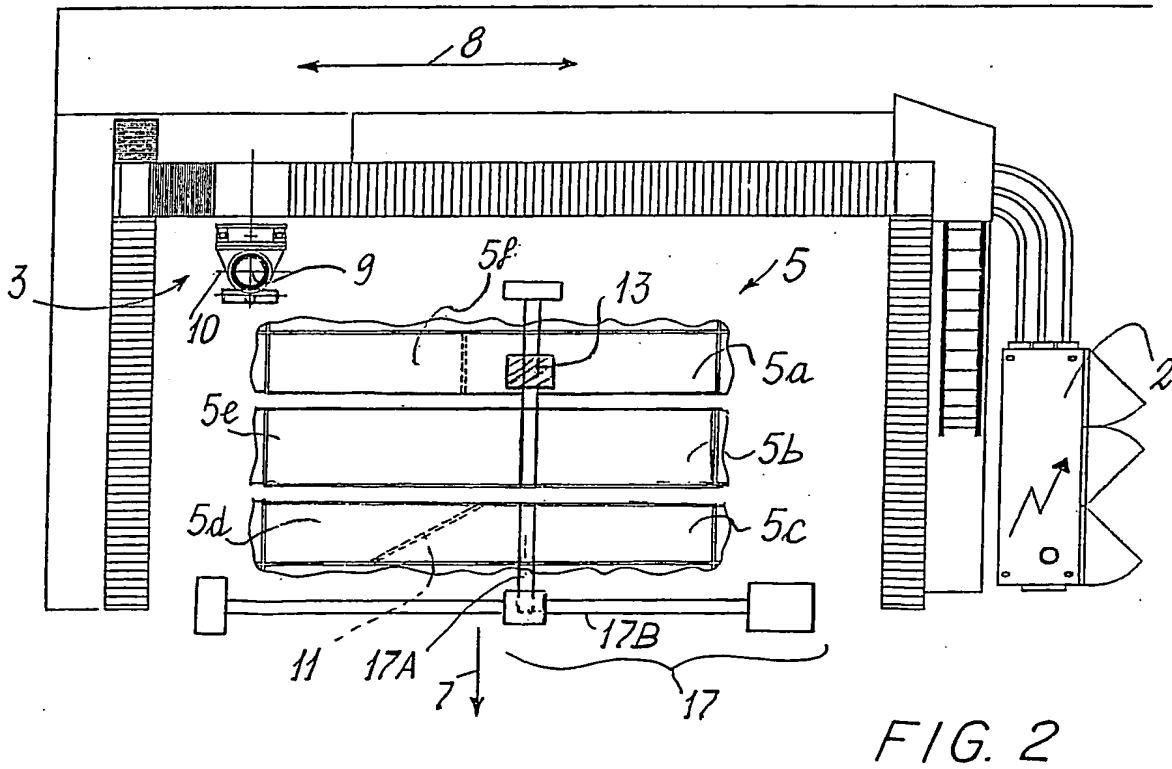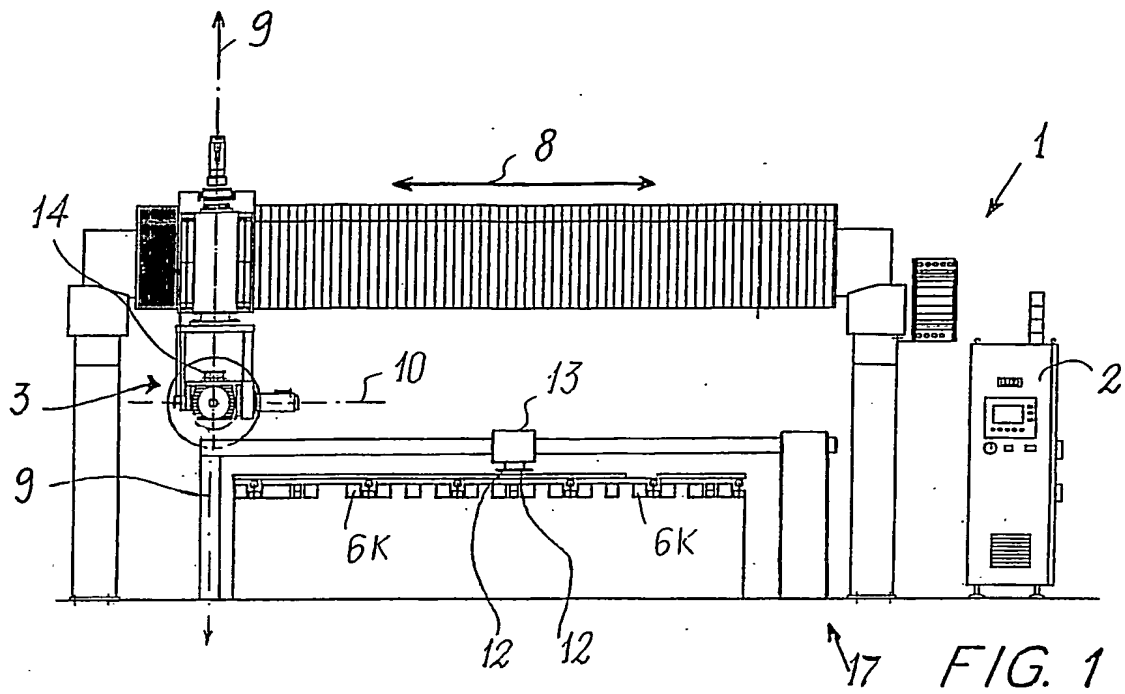

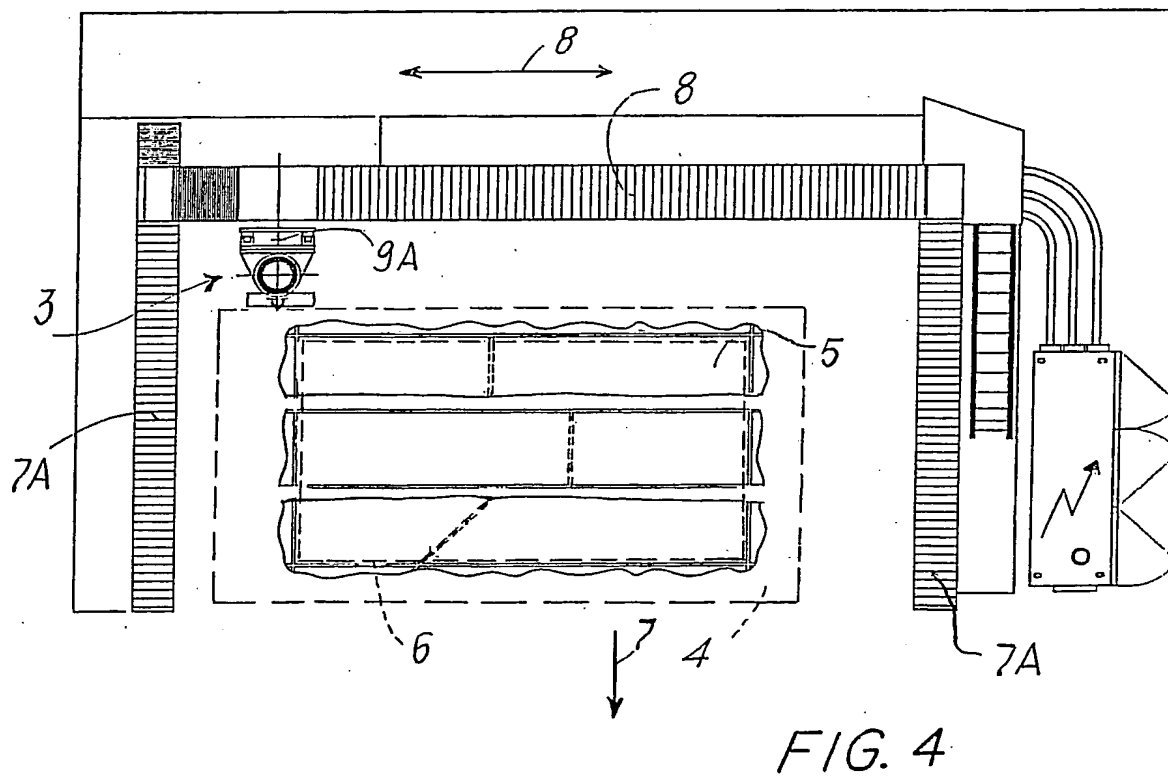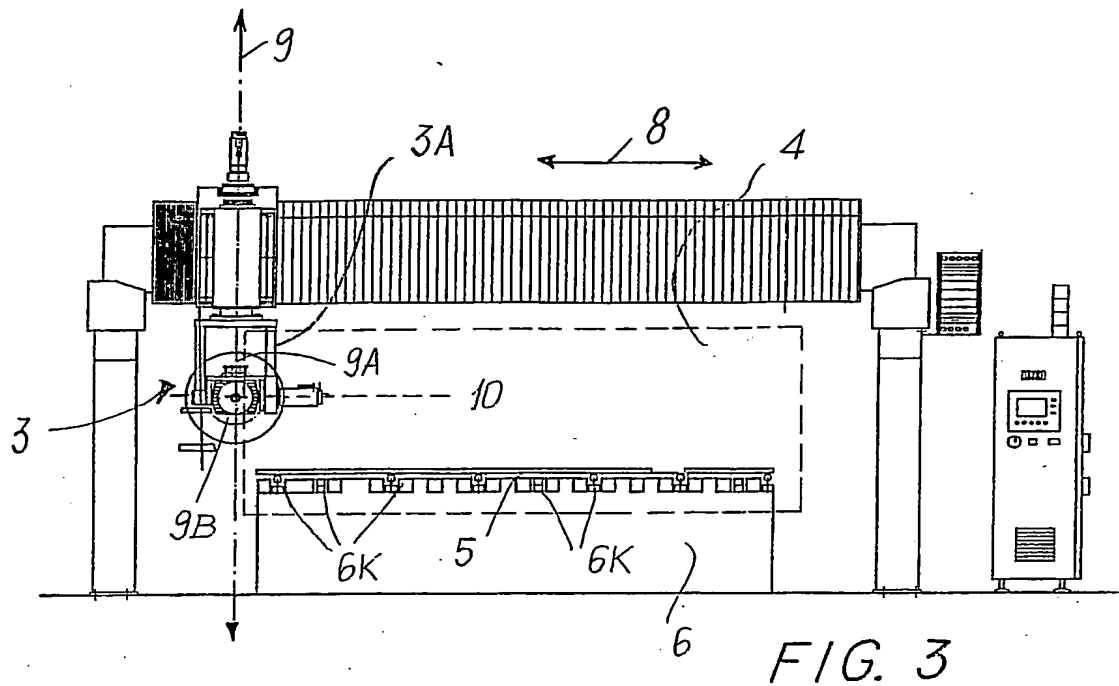

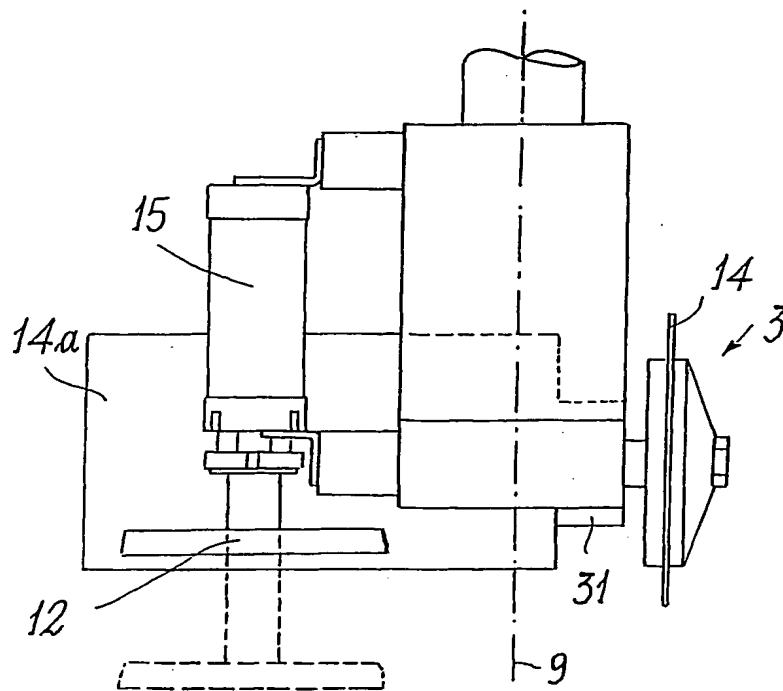


FIG. 5

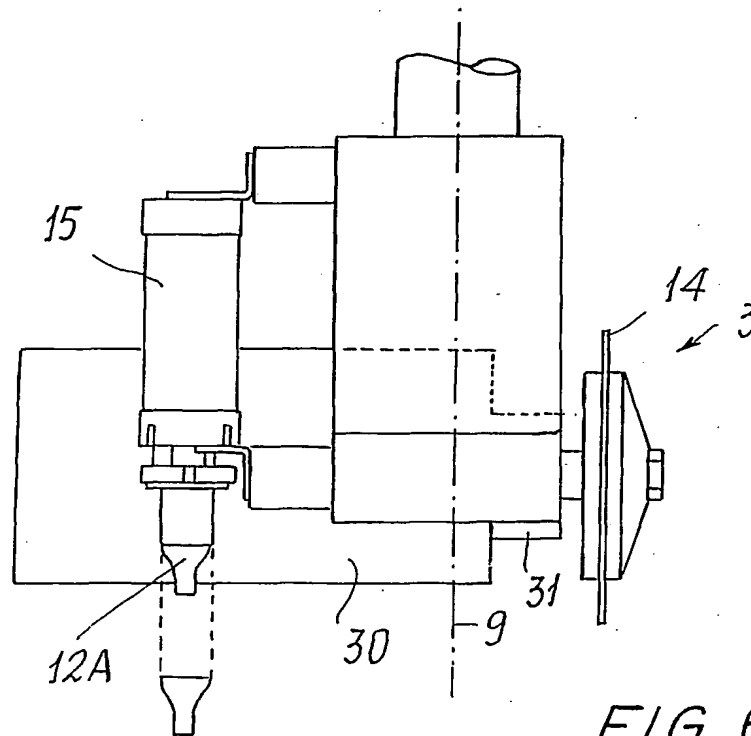
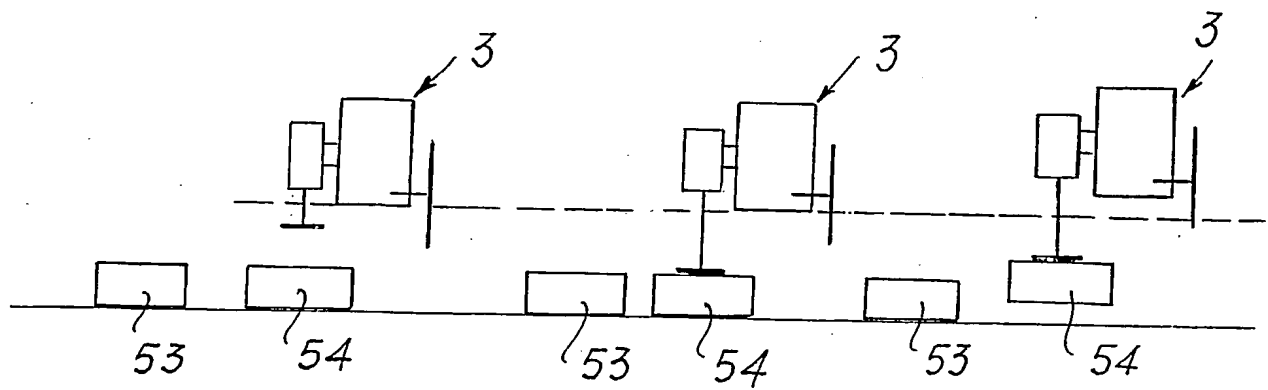
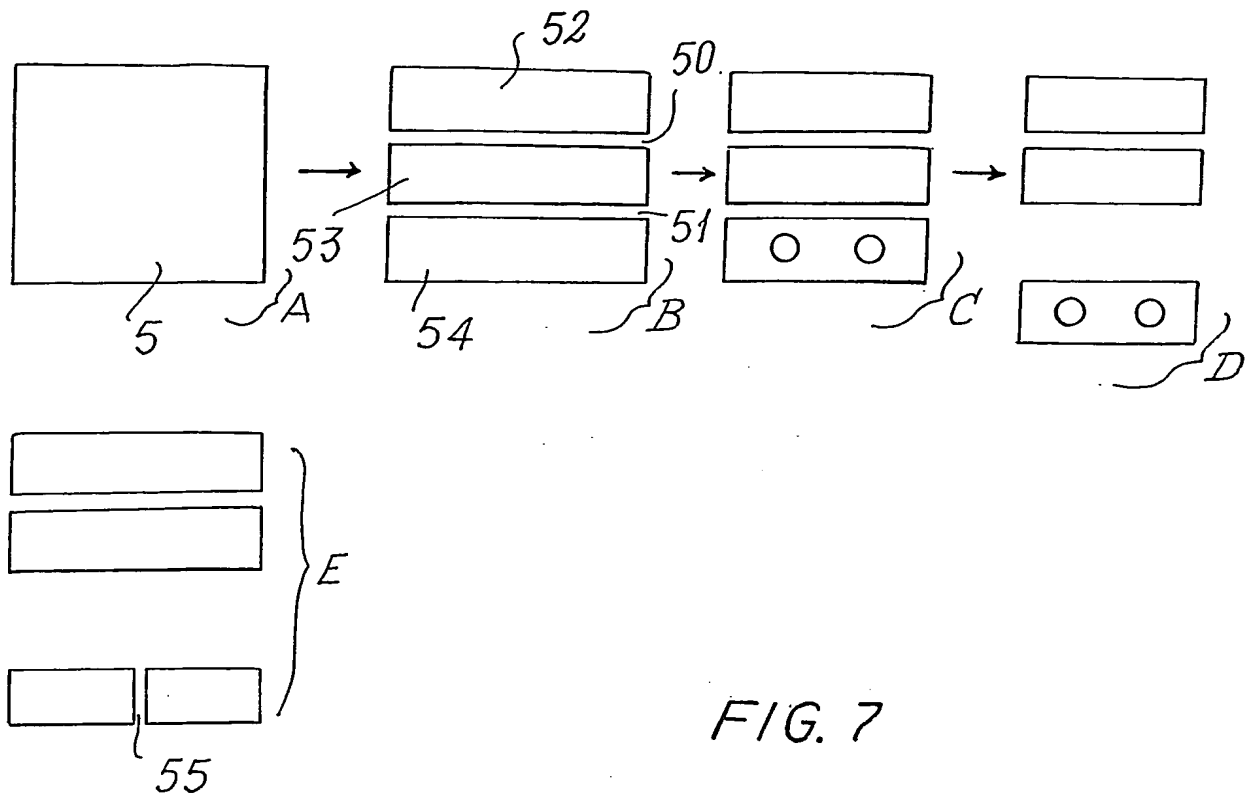
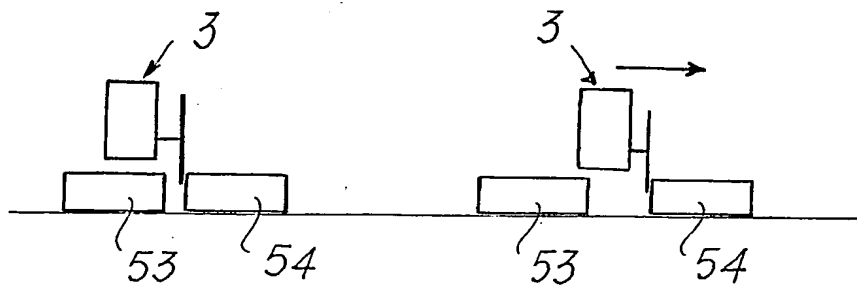
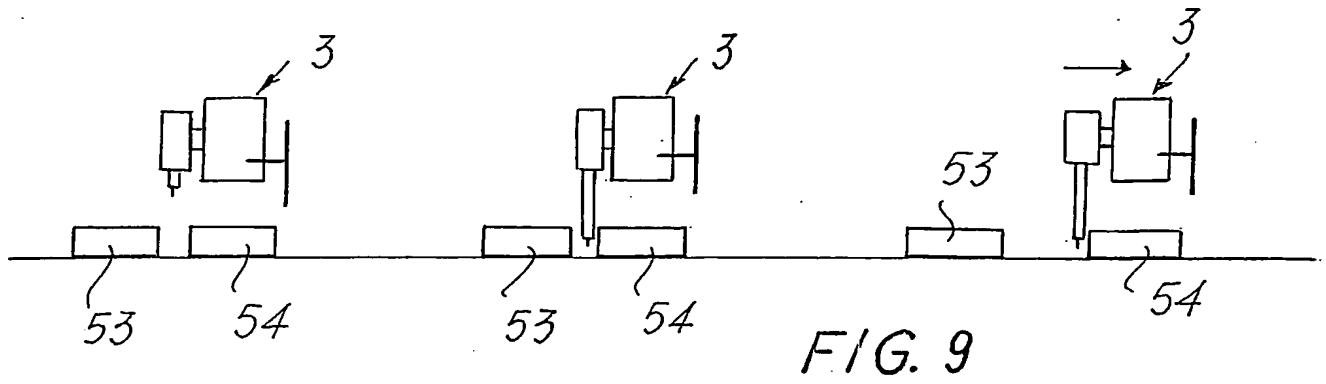


FIG. 6





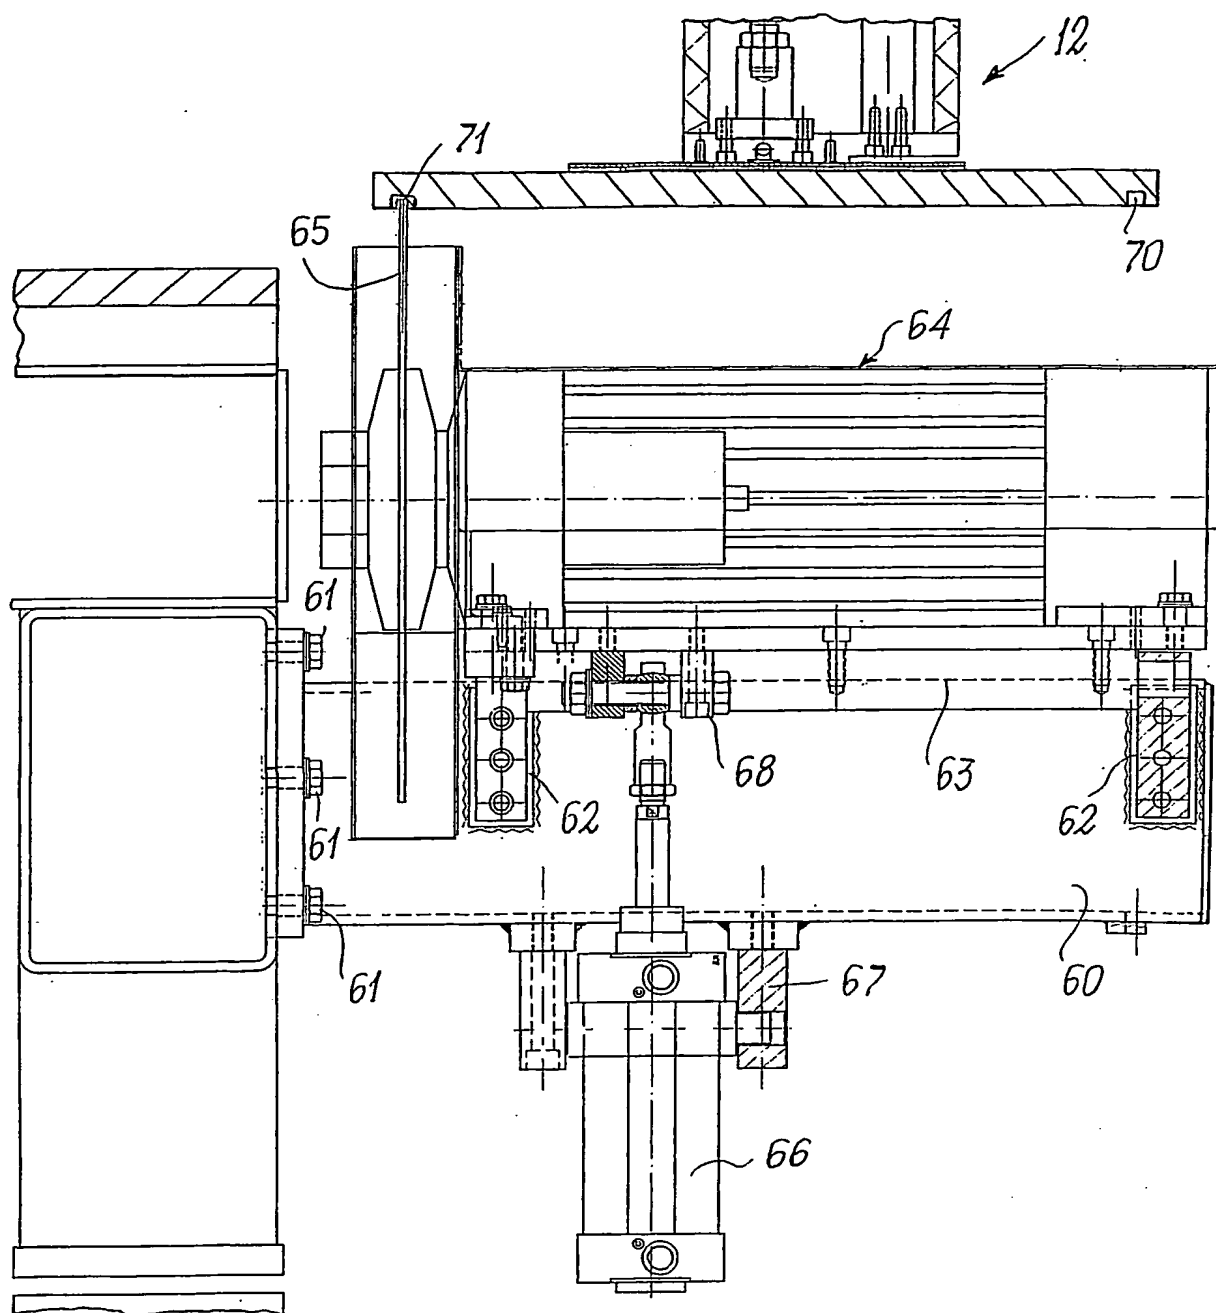
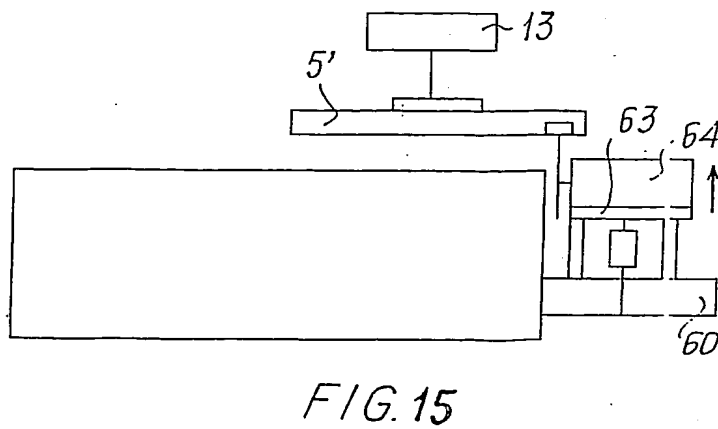
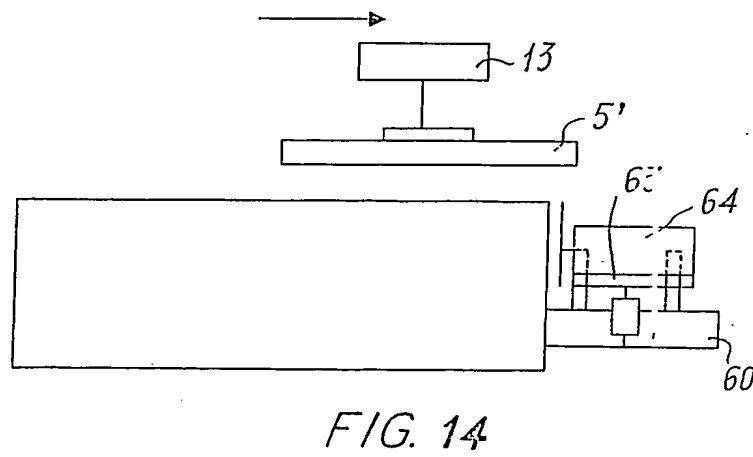
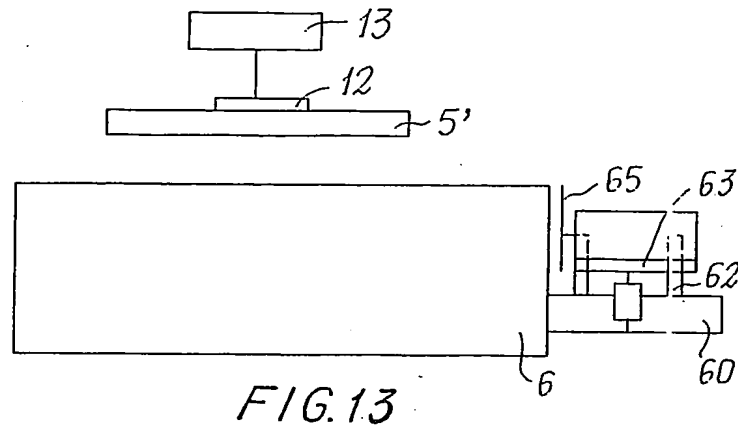
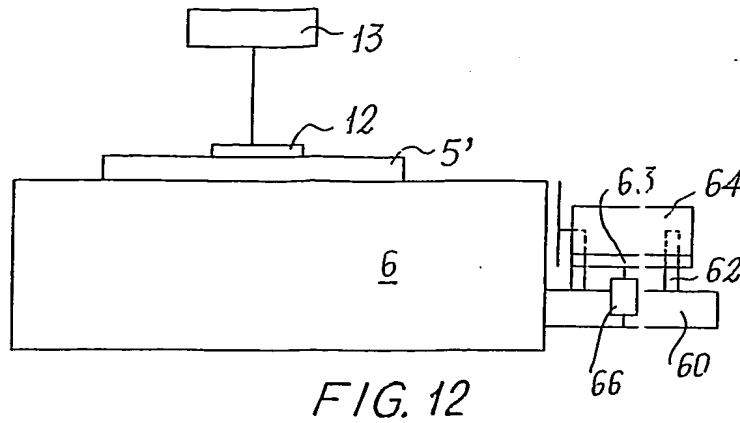


FIG. 11





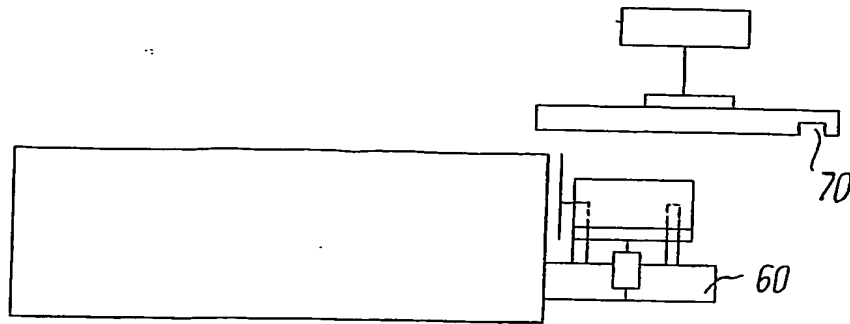


FIG. 16

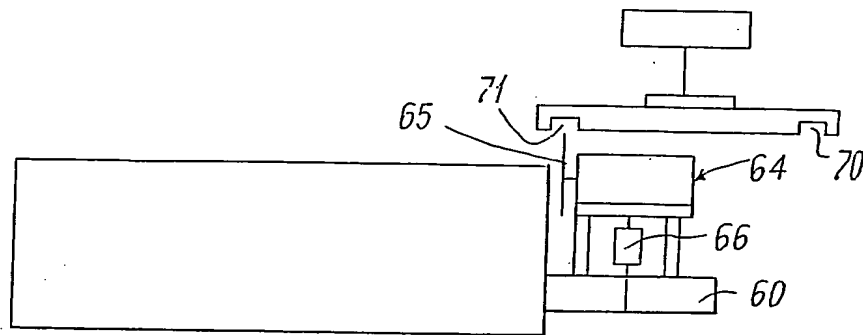


FIG. 17

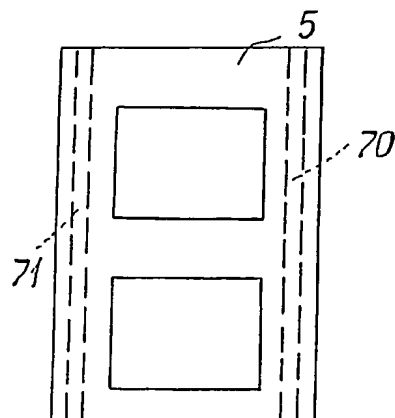


FIG. 18

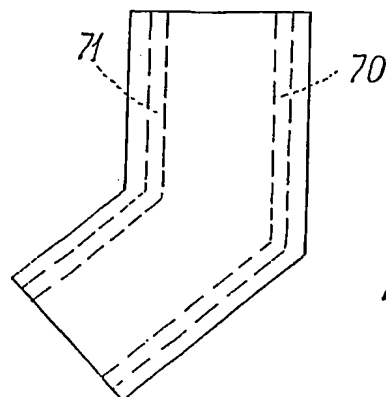


FIG. 19

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 03/06303

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B28D1/04 B23D45/02 B23D47/04 B28D1/00  
//B23D1/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B28D B23D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 101 09 007 A (LOEFFLER MASCHB GMBH) 12 September 2002 (2002-09-12) paragraph '0004! - paragraph '0009! paragraph '0013! paragraph '0017! paragraph '0031! - paragraph '0041!; figures 1-5	1-3, 5-7, 9-11
X	FR 2 706 348 A (CEBE ESCANDE) 23 December 1994 (1994-12-23) page 1, line 4 - page 2, line 25 page 6, line 19 - page 15, line 30; figures 1-9	1-4, 6-8, 10, 11
X	DE 66 06 703 U (PAPENMEIER GÜNTHER) 26 November 1970 (1970-11-26) page 6, paragraph 3 - page 9, paragraph 1; figure 1	1-3, 6
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

15 July 2004

Date of mailing of the international search report

28. 07. 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Frisch, U

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 03/06303

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 1 509 585 A (CHASE ELROY A) 23 September 1924 (1924-09-23) page 1, line 46 - page 2, line 28; figure 1	18
A	EP 0 631 015 A (TONCELLI MARCELLO) 28 December 1994 (1994-12-28) the whole document	18

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/IB 03/06303

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/SA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-11

A circular blade device comprising a numerical control means, a cutting head having a blade and manipulating means.  
---

2. claims: 1,12-18

A circular blade device comprising a numerical control means, a cutting head having a blade, manipulating means and a (second) cutting disc disposed below the workpiece.  
---

# INTERNATIONAL SEARCH REPORT



Information on patent family members

International Application No



PCT/IB 03/06303

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 10109007	A	12-09-2002	DE 10109007 A1	12-09-2002
			EP 1247606 A1	09-10-2002
FR 2706348	A	23-12-1994	FR 2706348 A1	23-12-1994
DE 6606703	U	26-11-1970	NONE	
US 1509585	A	23-09-1924	NONE	
EP 0631015	A	28-12-1994	EP 0631015 A1	28-12-1994
			DE 69321222 D1	29-10-1998
			DE 69321222 T2	18-02-1999
			ES 2123025 T3	01-01-1999

1/8

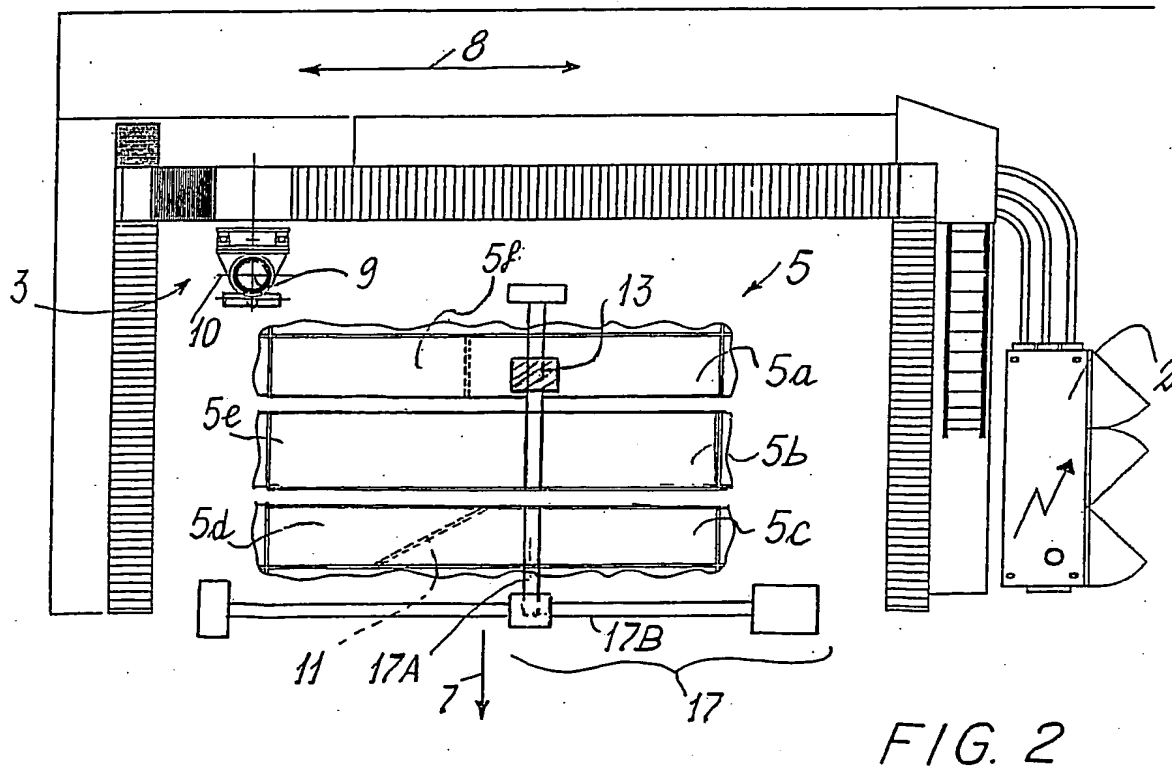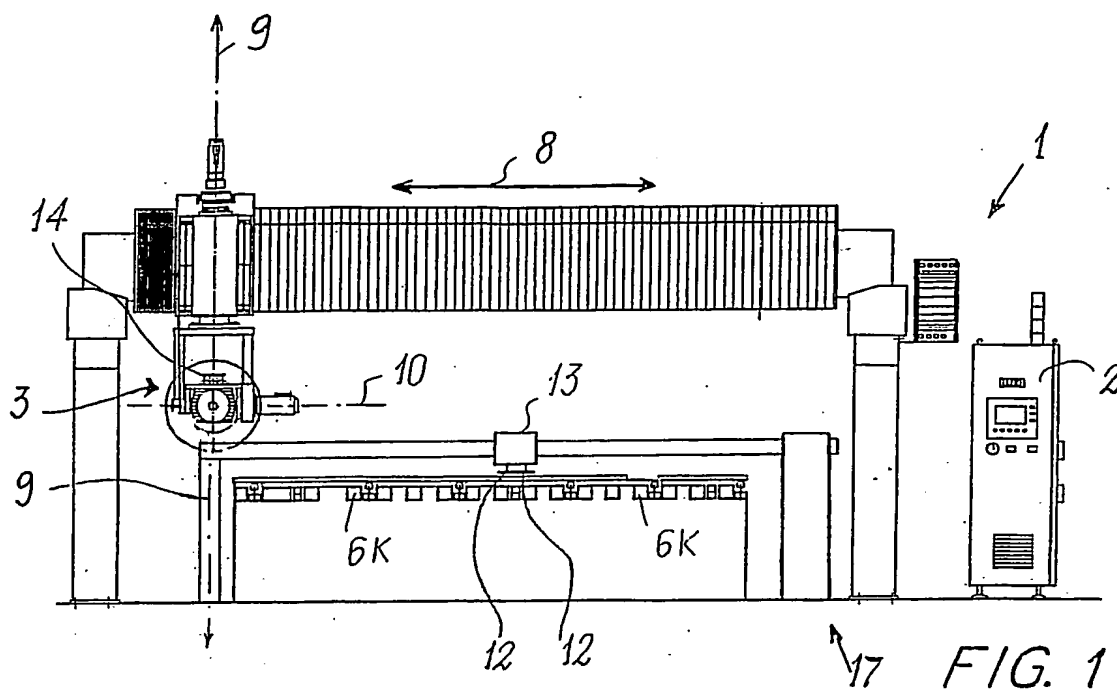

2/8

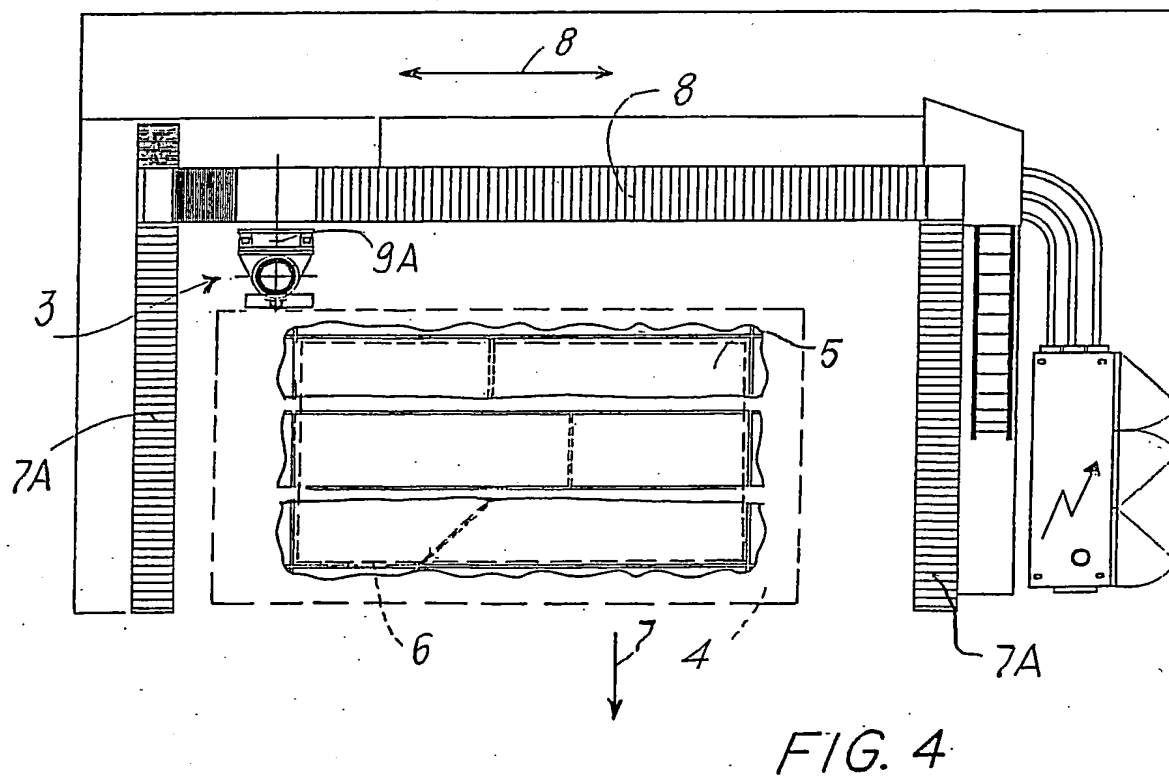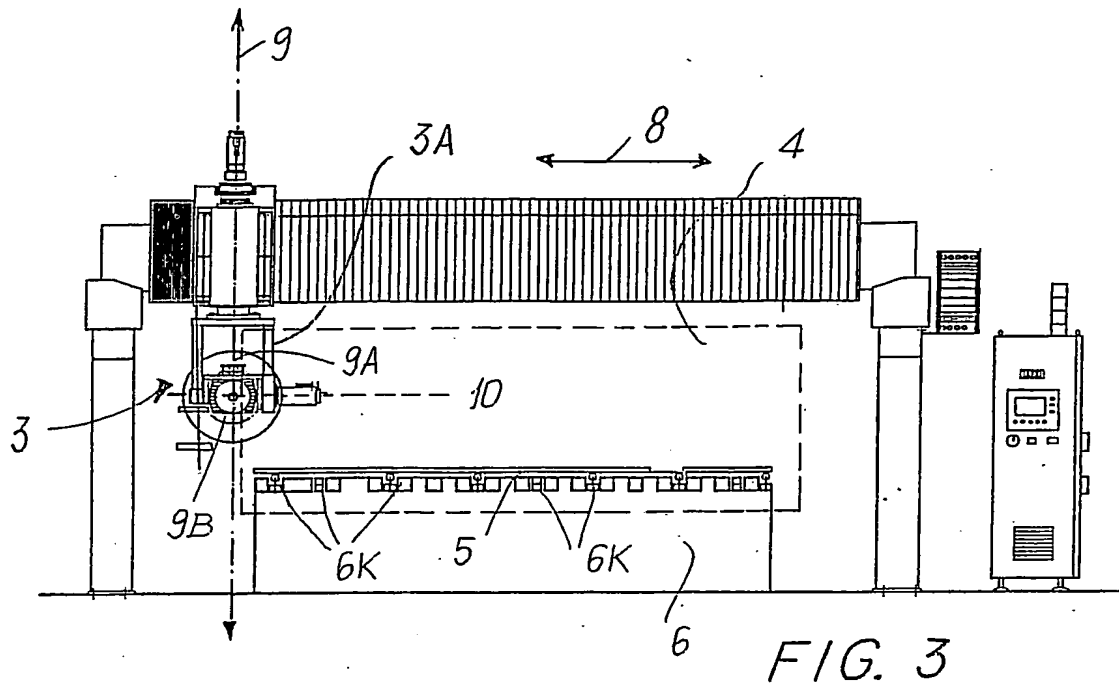



3/8

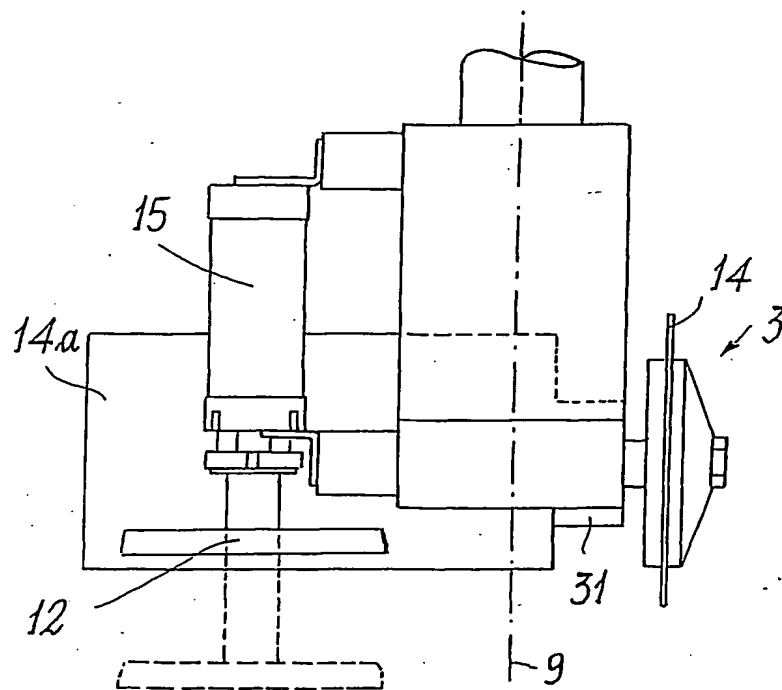


FIG. 5



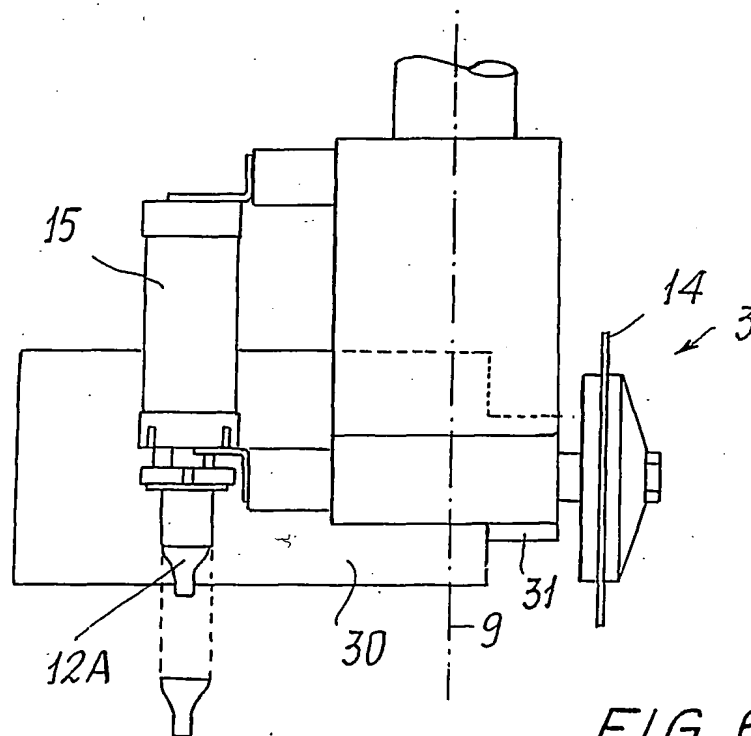


FIG. 6

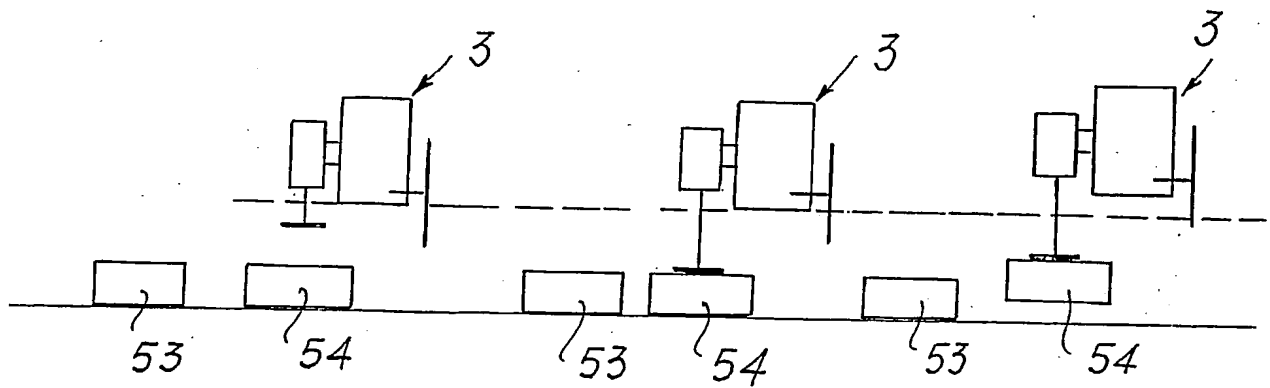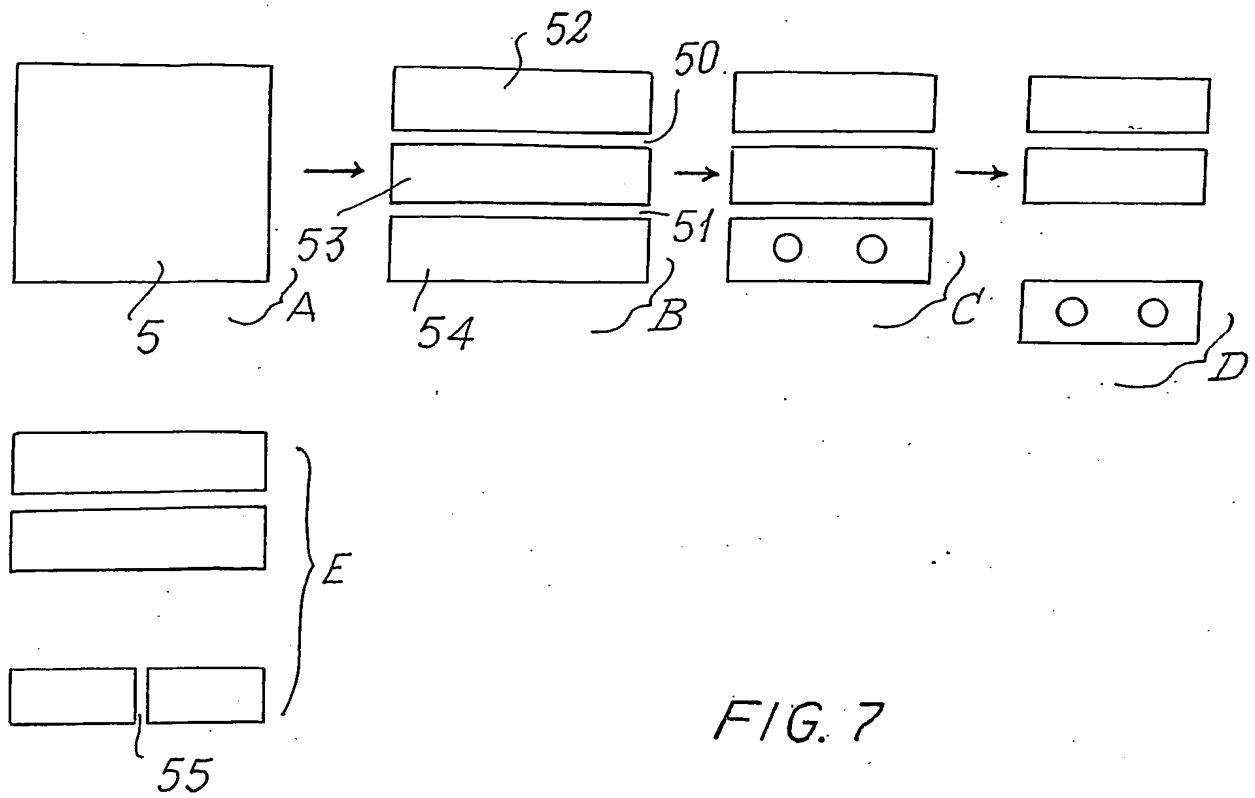

5/8

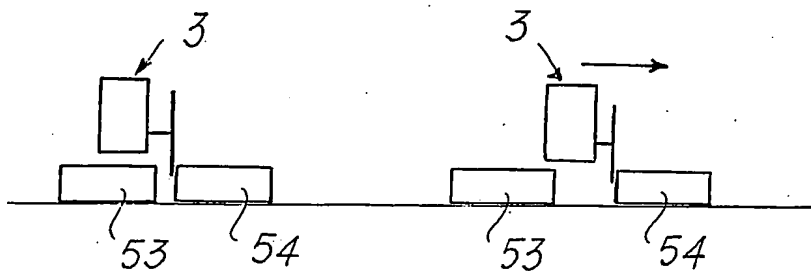
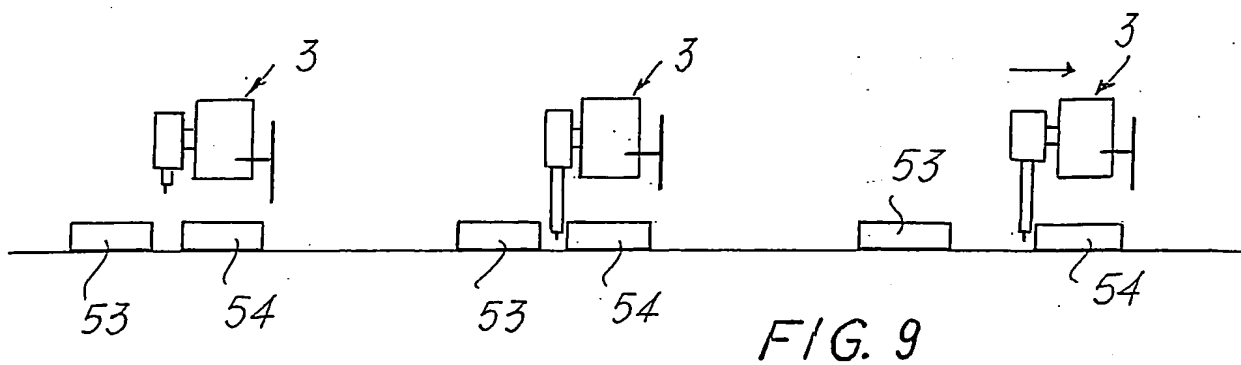


FIG. 10





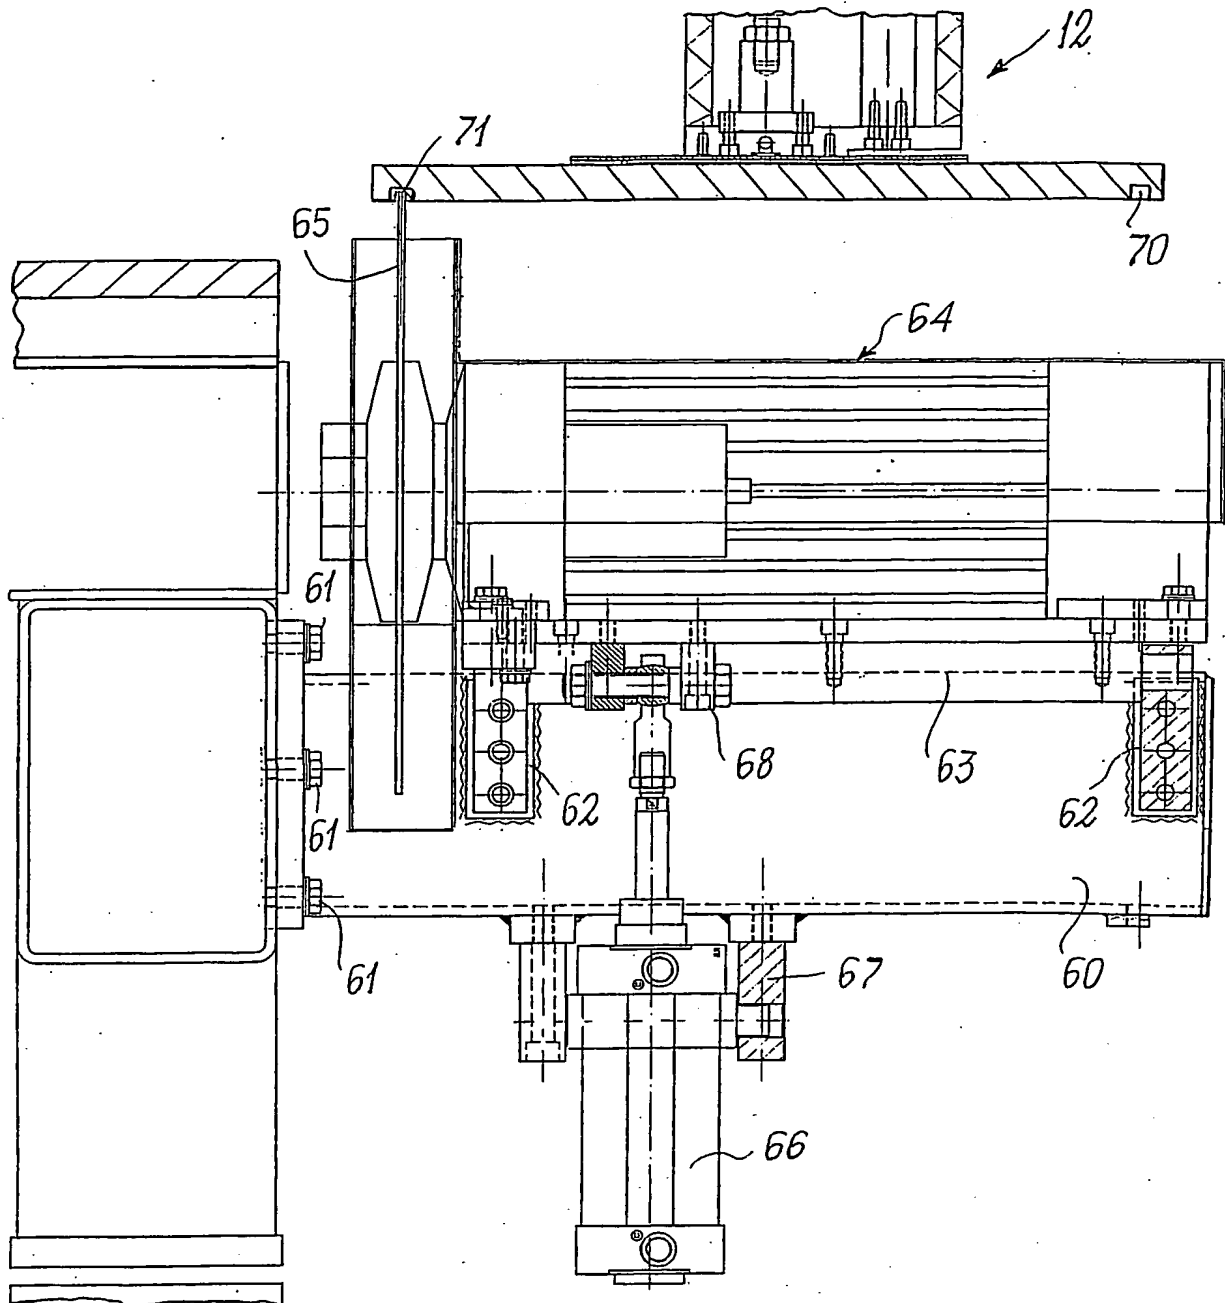


FIG. 11

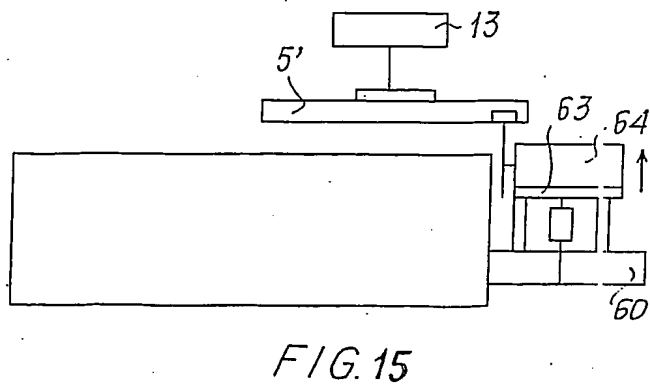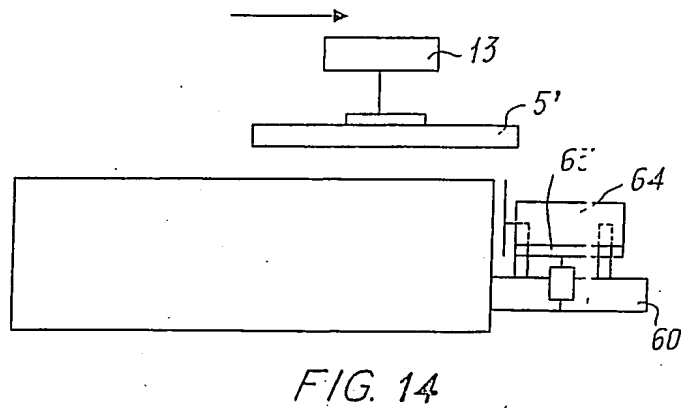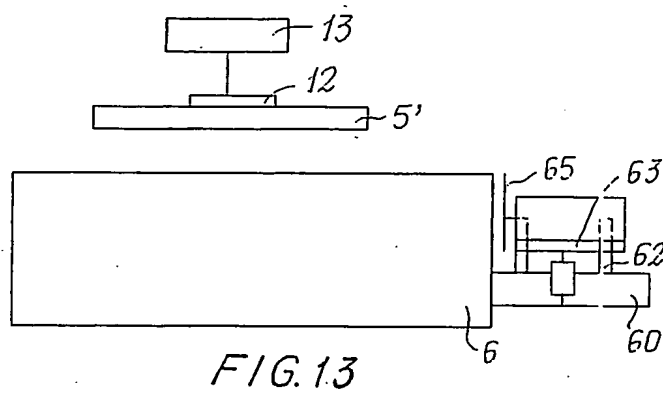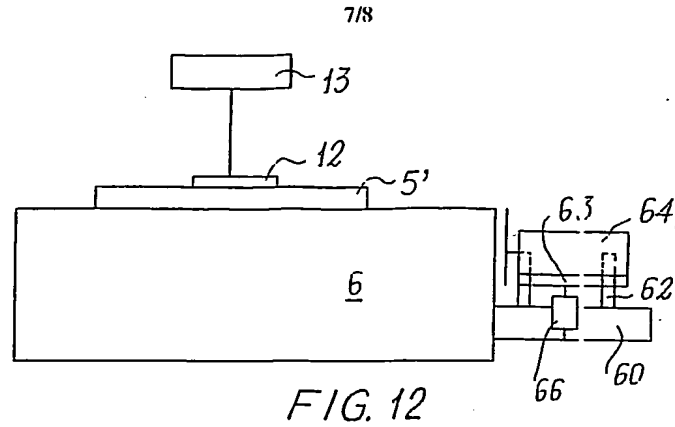

8/8

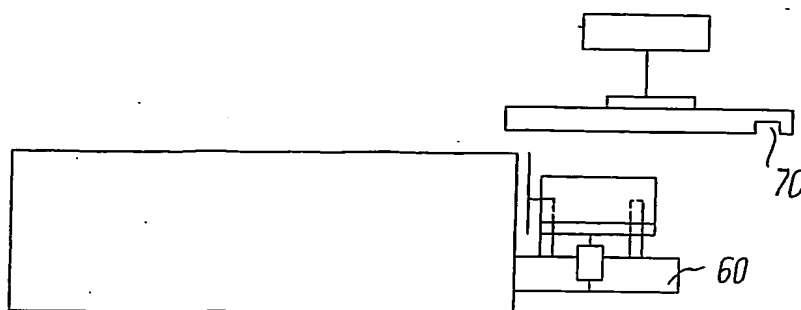


FIG. 16

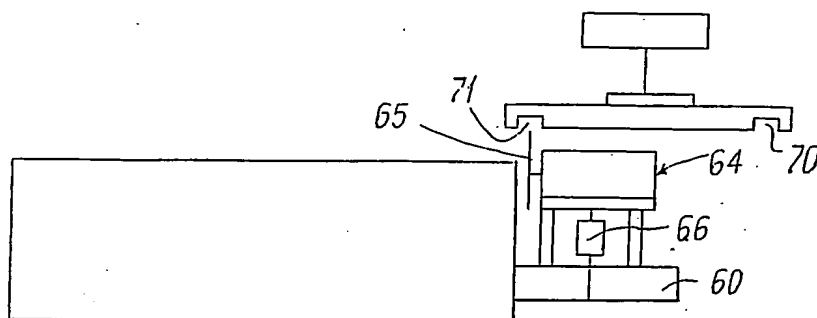


FIG. 17

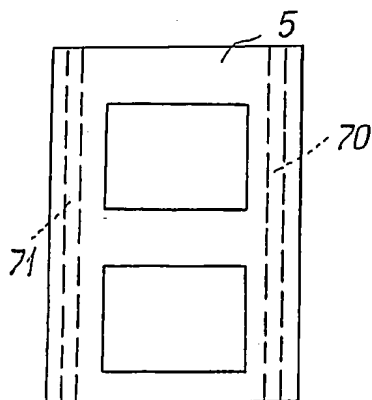


FIG. 18

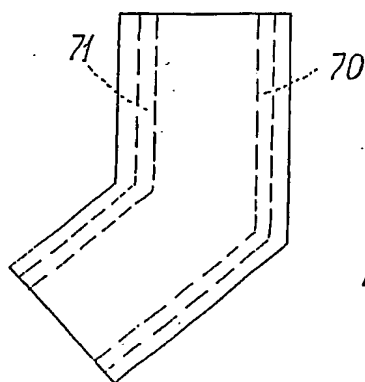


FIG. 19